

Towards energy security by promoting circular economy: A holistic approach

Manuel Taifouris, Mariano Martín*

Department of Chemical Engineering, University of Salamanca, Plza. Caídos 1-5, 37008 Salamanca, Spain

ARTICLE INFO

Keywords:

Agricultural residues
Sustainable process design
Natural gas
Circular economy

ABSTRACT

Dependence on fossil fuels, coupled with continuous supply disruptions by the most important natural gas suppliers, has jeopardized the energy security of most European countries. Therefore, determining the regions that can significantly increase their natural gas independence through the circular economy of their wastes is more important than ever. This work presents a multi-scale analysis to determine the possibility of implementing a circular economy towards reducing the regions dependency on fossil natural gas. A holistic approach is used to evaluate the availability of waste (manure, municipal solid waste, sludge, and lignocellulosic waste) and model the waste treatment processes (gasification and anaerobic digestion), together with a techno-economy analysis of the infrastructure required. A facility location problem optimizes the selection of the technology, the production capacity and the location of the facilities, according to the available budget. The analysis is focused on Spain, where, at the national level, an investment of 9458 M€ and an operating cost of 5000 M€ per year would allow covering 35% of the natural gas demanded. The regional analysis shows that a total of 19 provinces can be self-sufficient with this budget. These provinces have a high biomethane production potential through lignocellulosic waste gasification and a low demand for natural gas. Since energy is a basic commodity, the ability to produce enough biomethane to cover the entire demand for natural gas gives waste valorization strategic importance at both the social and economic levels.

1. Introduction

Notwithstanding the fact that significant efforts have been made to promote decarbonization policies among European countries [1], the current dependency on fossil fuels [2], their distribution [3], together with potential supply disruptions of the most important suppliers of natural gas, put the energy security of most countries of the European Union at risk [4]. Although this risk can be reduced through a robust natural gas supply chain design [5], this does not eliminate the need to import natural gas from other countries, reducing the European energy independence [4].

The growing world population has led to more intensive food production systems (crops, meat, and milk, among others) [6], creating areas of high organic waste production. Animal wastes, such as manure, can cause nutrient pollution, leading to the eutrophication of water bodies and soil deterioration if they are not properly treated [7]. Besides, in densely populated areas, where the production of municipal solid waste (MSW) and sludge is an issue, the treatment of this waste is quite inefficient, with 23% ending up in landfill and 26% being incinerated, losing a large part of its value [8].

Both problems can be solved simultaneously by following the principles of the circular economy of the waste. Technologies such as anaerobic digestion [9] of wet waste (e.g. manure, MSW or sludge) or

gasification [10] of dry residues (lignocellulosic waste) can provide the means to address the issue. In this context, there is a wide variety of studies focused on analyzing the biomethane production potential in different countries, such as United States [11] and Chile [12]. These studies make it possible not only to determine in which areas it is more efficient to direct waste treatment to biomethane production but also to find which of these areas can be energetically independent. This potential energy independence is an important incentive for waste treatment, due to the possibility of creating decentralized networks independent of the main pipelines [13]. This guarantees the availability of sufficient biomethane in those regions regardless of disruptions from foreign suppliers. However, most of these studies use empirical yields that directly relate biomethane production potential of a region to the number of animals, crops or people from which the residues are derived. This approach completely decouples the estimation of the amount and composition of biomethane from the transformation process and the specific composition of each waste. On the one hand, the composition of animal waste strongly depends on the feed, breed, sex, and age of the animals, which leads to large variability in the waste composition [14]. Moreover, the amount and composition of biomethane depend directly on the carbohydrate, lipid, and protein

* Corresponding author.

E-mail address: mariano.m3@usal.es (M. Martín).

content of these wastes [15]. This makes it very inaccurate to estimate a biomethane production potential only considering the type of animal. On the other hand, the design of the process depends on the amount and composition of the waste, modifying the design of the equipment (size and type of equipment), as well as the production and composition of products, affecting both the economic and environmental evaluation of the process [16]. Finally, the facilities must be located close to the areas where the waste is produced, due to the high economic and environmental costs associated with waste transportation [17].

A multi-scale approach allows addressing the different scales of the production system, such as physicochemical characterization of the raw material, product and process design, as well as network design and distribution, through the use of principal engineering components, such as modeling, design, synthesis, simulation, and optimization [18]. Some authors have used this approach to analyze renewable energy storage [19] or integrated livestock and crop management systems [20]. It allows not only the adaptation of the treatment processes to the properties and amount of the waste but also the location of the facilities. This approach optimizes the treatment processes for specific cases, reducing the cost of biomethane production, as well as allowing the integration of energy between the different stages of the process. However, despite the wide variety of studies about the use of waste to produce biogas [21], to the best of the authors' knowledge, there is no study that uses this holistic approach to analyze the application of the circular economy in reducing the country's dependence on fossil natural gas, as well as its operational and investment costs, the best location and size of the treatment facilities, and the optimal waste management budget.

Therefore, this work presents a study, which integrates a series of mathematical optimization models to determine, from a reduced number of parameters available in public databases, the amount of biomethane that different agricultural districts in Spain can produce from their wastes. This framework provides information on the optimal selection of treatment plants (size and type of waste treated), their location, the investment and operational costs, the production cost of the methane generated, and the percentage of consumption of CH₄ that can be covered by the biomethane produced by these factories. The main variable is the waste management budget. The rest of the document is organized as follows. Section 2 presents the optimization framework used to perform the proposed analysis, including a description of the problem, the procedure to estimate the amount of waste produced, the description of the processes considered to treat the waste, as well as, an explanation of the techno-economic analysis performed and the facility location problem. In Section 3, the model is applied to Spain, and the results are shown. Finally, in Section 4, the conclusions are presented.

2. Framework development

To approach this study from a holistic point of view, it is necessary to consider the estimation of the amount and composition of the waste, the design of the treatment processes (both gasification and anaerobic digestion), together with the economic evaluation of its scale-up, the optimal selection of the location and size of the facilities.

First, the framework starts by dividing the country into spatial units (provinces, counties, etc.). From the information corresponding to animal population (number of animals and their age), cultivated area, and population in each spatial unit, it is possible to estimate the amount of waste generated. Next, by modeling the gasification and anaerobic digestion processes, it is possible to establish the amount and composition of biomethane that can be produced from the composition of each of the wastes and the operating conditions of the processes. In addition, both investment and operating costs can be determined through the design of the equipment that conforms the processes. This modeling aims at determining the operating conditions to minimize the cost of biomethane production, establishing the relationship between treatment capacity, capital invested, operational costs, and biomethane

Table 1
Lignocellulosic residues from crops [25].

| Crop | Residue yield (t/ha) |
|---------|----------------------|
| Maize | 8.9 |
| Sorghum | 6.4 |
| Wheat | 5.9 |
| Rye | 4.7 |
| Oats | 4.1 |
| Barley | 4.0 |

Table 2
Composition of the wet wastes [26–31] (RM: Raw material).

| Waste | Manure | MSW | Sludge |
|------------------|---------|--------|--------|
| Unit | g/kgRM | | |
| Lipids | 0.880 | 1.501 | 0.333 |
| Carbohydrates | 17.435 | 38.766 | 2.057 |
| Protein | 3.1988 | 13.740 | 2.856 |
| Total Solids | 220 | 140 | 170 |
| Volatile Solids | 204.600 | 93.800 | 93.500 |
| Total Nitrogen | 0.229 | 1.159 | 0.144 |
| Organic Nitrogen | 0.114 | 0.062 | 0.043 |
| Phosphorous | 0.097 | 0.169 | 0.124 |
| Potassium | 0.620 | 0.620 | 0.620 |

produced. Since biomethane is to be injected into the country's gas installations, it is necessary that this gas complies with the technical specifications required by the country's regulations. Finally, based on the results of the previous step, a facility location problem searches for the size, type, and location of the facility that maximizes the total biomethane production for a specific budget.

2.1. Estimation of the production and composition of waste

To estimate waste production, different procedures are followed depending on the nature of the waste:

- Lignocellulosic waste: This residue is estimated from the amount and type of crops grown per year. The amount of residue grown by the type of crop can be consulted in Table 1. It is considered that all the waste generated is available to produce biomethane.
- Manure: The amount of manure is estimated from the number of animals and their age. 22 t/y of manure are generated by cows and calves with ages higher than 24 months, 19 t/y by calves with ages between 12 and 24 months, and 11 t/y by calves with age lower than 12 months [22].
- MSW and Sludge: The amount of these wastes is estimated based on the number of inhabitants of cities with a population of more than 50,000 ha. 388 kg [23] of MSW and 105 kg [24] of sludge are generated per inhabitant and year in Spain.

The most common compositions of these residues from the literature are used, which can be consulted in Tables 2 and 3. In the case of lignocellulosic residues, an average composition has been used among the different types of residues that can be generated in crop management, since the composition varies very little from one to another. These compositions can be updated through specific studies to increase the accuracy of the estimates.

2.2. Process analysis and design

In this section, the processes considered for waste treatment, the gasification of dry waste (i.e. lignocellulosic waste), and the anaerobic digestion of wet waste (i.e. manure, MSW, and sludge) are modeled. In addition, a techno-economic analysis is performed, considering 50 different waste treatment capacities for each of the wastes considered. The designs are optimized to minimize methane production costs using a non-linear program (NLP).




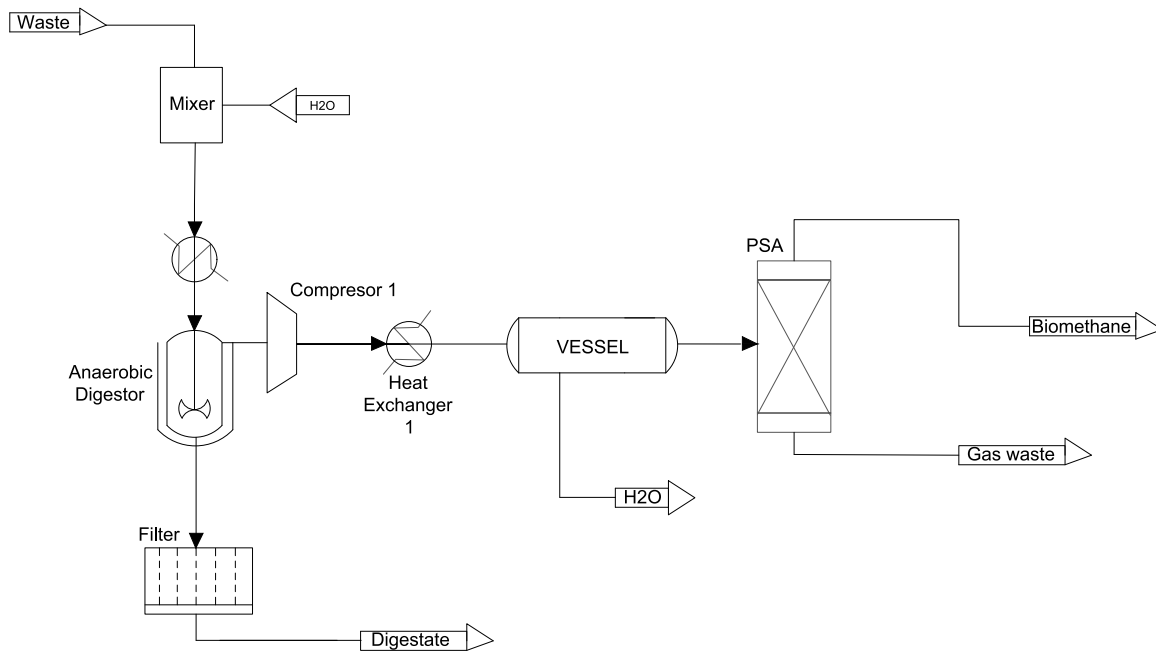


Fig. 2. Flowchart of the biomethane production process through anaerobic digestion.

carbohydrates ($C_6H_{10}O_5$), and proteins ($CH_{2.03}O_{0.6}N_{0.3}S_{0.001}$) are shown by Eqs. (5), (6) and (7), respectively. $C_5H_7NO_2$ is the empirical formula of cell mass.



Using the information from the model of Taifouris and Martín [16], together with a series of physical–chemical parameters of the residues (total solids, volatile solids, carbon content, etc.), the model of León and Martín [9] can adjust the distribution of the different gases (mainly H_2O , NH_3 , and CO_2) between the gaseous (biogas) and the liquid phases (digestate). In addition, this new model allows estimating the amount of nutrients (nitrogen, potassium, and phosphorus) that the liquid/solid effluent of the bioreactor has, crucial information to evaluate the usefulness of the digestate produced.

The biogas is purified by using a bed of iron, to remove the H_2S , and a PSA system to reduce their CO_2 , NH_3 , and H_2O content to achieve an acceptable biomethane composition. The detailed explanation of this process, together with the balances of mass and energy, the thermodynamic models, and empirical yields, is shown in the supplementary material.

2.2.3. Techno-economic analysis and process scale-up

A process is designed for each type of waste, as described in Sections 2.2.1 and 2.2.2, together with the corresponding operational expenditure (OPEX) and capital expenditure (CAPEX), modeling up to 50 designs with different waste treatment capacity. The sizes range from a minimum size, which depends on the minimum amount of waste available considering all the space units of a country; and a maximum size that is fixed by Ref. [39] (for wet residues) or the maximum waste available considering all spacial units (for lignocellulosic waste). Each

of these designs is optimized through an optimization model whose objective function is to reduce biomethane production costs.

For the OPEX, both fixed and variable costs are estimated, following the procedure described in [40]. The cost of waste is not considered because it is produced at the same place where it is treated and has no market value so far. However, the auxiliary costs (steam, water, and energy) are considered and determined from the mass and energy balances carried out for each of the processes. In addition to these costs, labor, maintenance, laboratories, depreciation, and insurance (all fixed costs) are estimated following the procedure of Sinnott [40].

Regarding CAPEX, the first step is to estimate the cost of the equipment. Each piece of equipment that constitutes the processes of anaerobic digestion and gasification is analyzed, as well as its size and its cost estimation. For the economic estimation of the reactors, the bed of ZnO , as well as the indirect gasifier, the procedure described in the work of Sánchez et al. [10] is used. The compressors, heat exchangers, and the fire heater are designed following the correlations shown in the work of Couper et al. [41], while the electrostatic precipitator, filters, and cyclones are designed based on the studies of Almena and Martín [42]. The digester is designed following the work of Taifouris and Martín [16]. Once the cost of equipment is estimated, the rest of the capital costs (equipment erection, instruments, process buildings, and structures, among others), necessary for the construction and start-up of the factories, can be calculated following a factorial method, which is shown in [40]. For more information on economic estimation, please consult the supplementary material.

2.3. Facility location problem

Following the results from the previous stages, an extended facility location problem is formulated to select the number, size, type, and location of facilities, between the 50 possible designs. It is a mixed-integer linear programming (MILP) that aims at maximizing the total biomethane production for a specific budget. Binary variables are used for plant selection. First, it is necessary to determine the amount of biomethane ($Biomet_p$) that can be produced in each spatial unit 'p'. This depends on the number of each type of factory (each design 'q' of each kind of waste 'w') installed in each spacial unit 'p' ($Nfact_{w,q,p}$) and its biomethane production ($CH_4fact_{q,w}$), by using Eq. (8).

$$Biomet_p = \sum_w \sum_q Nfact_{w,q,p} \cdot CH_4fact_{q,w} \quad \forall p \quad (8)$$

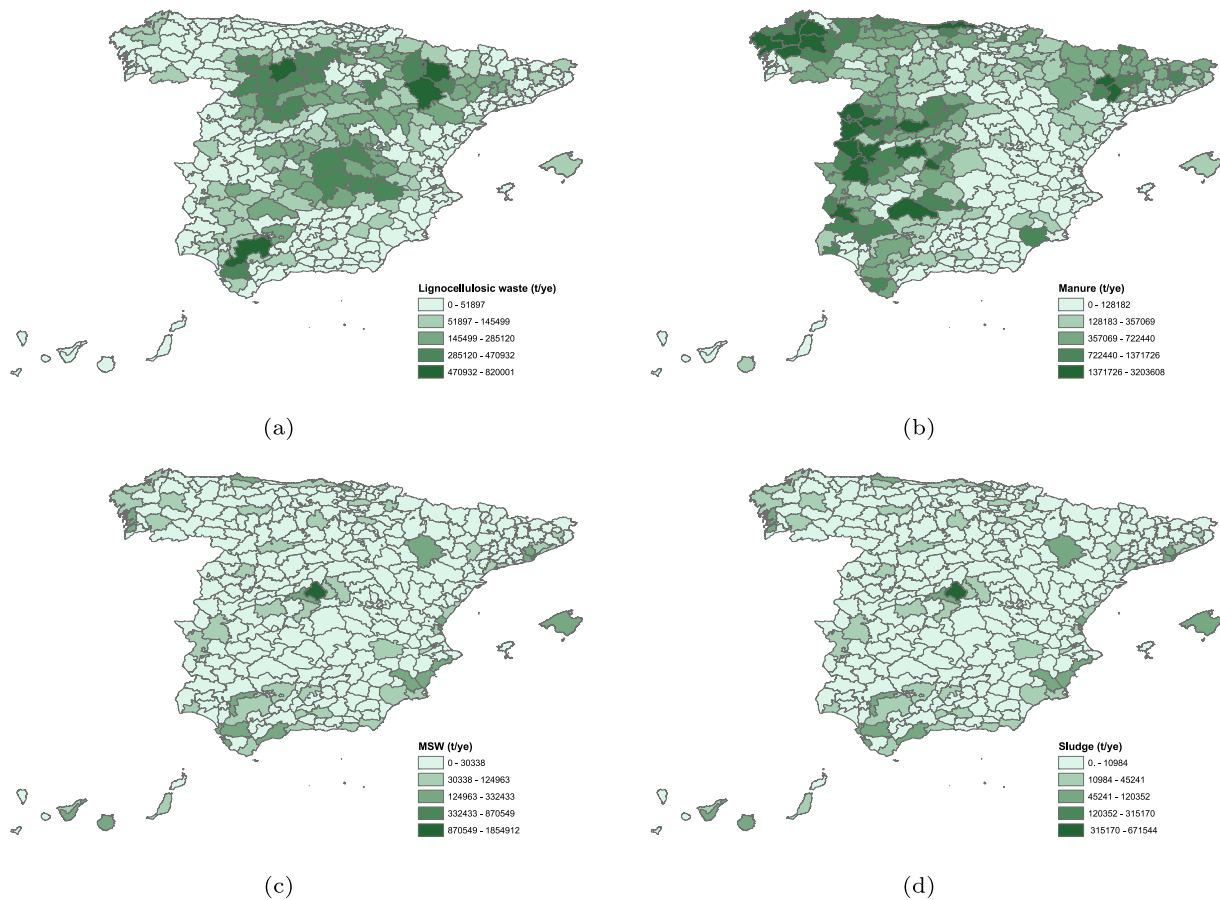


Fig. 3. Amount of (a) lignocellulosic wastes, (b) manure, (c) MSW and (d) sludge.

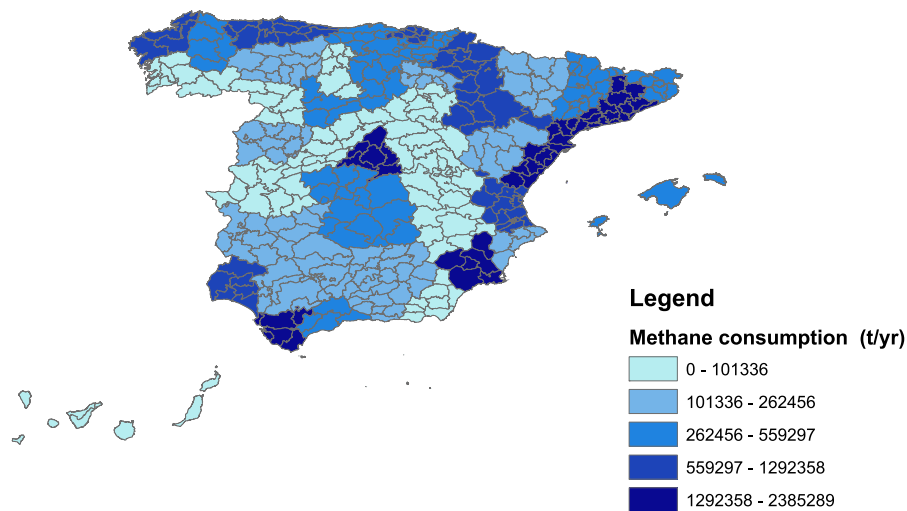


Fig. 4. Consumption of natural gas in each agricultural district.

$CH4fact_{q,w}$ is obtained as a result of the previous stages.

Since the plants installed in a spatial unit ‘p’ cannot consume more waste than the one available at that location, it is necessary to estimate the total waste treated by all of the installed plants in a spatial unit ‘p’ ($Wst_{w,p}$) through Eq. (9).

$$Wst_{w,p} = \sum_q Nfact_{w,q,p} \cdot Waste_{q,w} \quad \forall w \quad (9)$$

Where $Wastefact_{q,w}$ is the treatment capacity of a plant with the design ‘q’ treating the waste ‘w’.

Regarding OPEX and CAPEX of all waste treatment plants installed in a spatial unit ‘p’ ($CstO_p$ and $CstF_p$, respectively), they are estimated by Eqs. (10)–(11), respectively.

$$CstO_p = \sum_w \sum_q Nfact_{w,q,p} \cdot CO_{fact_{q,w}} \quad \forall p \quad (10)$$

$$CstF_p = \sum_w \sum_q Nfact_{w,q,p} \cdot CF_{fact_{q,w}} \quad \forall p \quad (11)$$

Table 4
Main results of the techno-economic analysis of the residues (q: Capacity of factory (t/y), WW: Wet waste).

| Residue | Yield (kg _{biomethane} /kg _{WW}) | Production cost (€/kg _{WW}) | Minimum capacity (t/y) | Maximum capacity (t/y) |
|---------|--|--|---------------------------|---------------------------|
| SLUDGE | 0.003 | Pcost = 1814278231 · q ^{-0.97} | 700,624 | 49,754 |
| MANURE | 0.012 | Pcost = 160365047 · q ^{-0.885} | 63,072 | 367,920 |
| MSW | 0.070 | Pcost = 72035915 · q ^{-0.97} | 19,657 | 52,560 |
| LIGNO | 0.285 | Pcost = 606041 · q ^{-0.626} | 10,000 | 820,000 |

Where OPEX and CAPEX of each of the different designs ‘q’ for each of the different wastes ‘w’ (COfact_{q,w} and CFfact_{q,w}) are obtained by following the procedure described in Section 2.2.3. Thus, the total OPEX (Topex) and the total CAPEX (Tcapex) are calculated by Eqs. (12)–(13). Transportation costs are not considered since it is expected that the facilities are located near the areas with a high waste production, due to the high economic and environmental costs associated with waste transportation [17]. Therefore, this cost will be negligible compared to the COPEX and OPEX of the factories.

$$Topex = \sum_p Cos tO_p \quad (12)$$

$$Tcapex = \sum_p Cost F_p \quad (13)$$

Topex must be less than the selected annual budget (Eq. (14)).

$$Topex \leq Annual \ Budget \quad (14)$$

With the selected budget, the fraction of natural gas demanded that can be covered by biomethane (fcov_p), in each spacial unit ‘p’, is given by Eq. (15), while the total fraction covered (Tfra) is estimated by Eq. (16).

$$fcov_p = \frac{Biomet_p}{NGas_p} \quad \forall p \quad (15)$$

$$Tfra = \frac{\sum_p Biomet_p}{\sum_p NGas_p} \quad (16)$$

3. Results

3.1. Case of study

The optimization framework presented in previous sections is applied to analyze the reduction of fossil natural gas dependence in Spain towards the circular economy of its waste. The country is divided into agricultural districts, that is, 345 possible locations. Among the different countries of the European Union, Spain has been selected for three reasons. It has a large agro-industrial production [43], and therefore, a large production of waste. In addition, Spain is highly dependent on foreign natural gas suppliers [44]. Finally, the current production of biomethane is quite limited compared to other countries [45].

Regarding waste production, Fig. 3 shows the spatial distribution of lignocellulosic waste (a), manure (n), MSW (c), and sludge (d), in Spain. Lignocellulosic residues are estimated from annual crop data [46]. Manure is estimated from animal census and age distribution [47], while that MSW is calculated from the population of all cities with more than 50,000 inhabitants. In those agricultural districts that have more than one city with these characteristics, their MSW production is added, while in those that only have cities with less than 50,000 inhabitants, their MSW production is assumed to be 0.

The consumption of natural gas can be seen in Fig. 4. This consumption can be estimated from reports [48]. The technical specifications of the biomethane obtained must comply with the specifications indicated in the Ref. [49].

Finally, the optimization framework used for this study consists of two different types of mathematical optimization models. An NLP for each process design, and an MILP for facility location problem, which are solved in an Intel Core i7-7700 computer at 3.6 GHz (4.2 GHz as turbo frequency), 65 W of TDP, 4 core with 8 threads, and 32 Gb of RAM (1200 MHz) by using GAMS.

3.2. Properties of the different types of factories

As explained in Section 2.2.3, 50 different factories, with different production capacities, are designed and optimized for the treatment of the wastes considered, based on the characteristics of the regions considered in this case of study. These spatial units determine the maximum and minimum size of these factories. Once designed, following the procedure described in Section 2, the waste processing capacity, methane production, as well as OPEX, and CAPEX to build them can be determined. The most relevant data are shown in Table 4. Although the relationship between biomethane production and treatment capacity of the plant is linear with the treatment capacity, the production cost of biomethane follows a power law. This is due to the strong economies of scale since a large part corresponds to fixed costs, above 90%.

3.3. Total potential of biomethane production in Spain

The results show that 43% of natural gas consumed could be supplied through the treatment of the available wastes. However, this requires a total CAPEX of 21 391M€, as well as an OPEX of 25 852M€ per year. In order to obtain these results, the process design is optimized to maximize biomethane production at each spot, but the localization of the plant is not optimized, as it aims at treating all available waste.

The maximum amount of biomethane that can be produced in each agricultural district is shown in Fig. 5(a). If this distribution is compared with the amount of residues (Fig. 3), it can be observed that the production of biomethane is consistent with the distribution of lignocellulosic waste. This is because most of the biomethane is produced from lignocellulosic waste by using gasification. This technology has a yield of 28.5% (28.5 kilograms of biomethane are generated per 100 kilograms of biomass) while manure, MSW, and sludge have yields of 1%, 7%, and 0.3%, respectively (see Table 4). The large difference between these yields is due to the composition of the waste and the technology used to produce biomethane. Manure, MSW, and sludge use anaerobic digestion, while lignocellulosic waste uses gasification. For this reason, although the amount of residues is larger in the cases of wet waste, the amount of biomethane generated from lignocellulosic wastes is larger (8250 kt/yr vs 2103 kt/yr).

By analyzing the fraction of natural gas demand satisfied by using biomethane (see Fig. 5(b)), there is a total of 21 provinces that would be totally independent of natural gas with this capital investment. Some of those that have a higher level of independence include ‘La Coruña’, ‘Ávila’, ‘Ciudad Real’, ‘Almería’, ‘Huelva’, and ‘Balears’. In addition, there is an important mismatch between large industrial zones, urban areas, and the main cultivation regions. It is responsible for that difference between production and demand (see Figs. 3 and 4). The demand is highly centralized in provinces such as ‘Madrid’, ‘Barcelona’, ‘Asturias’, ‘Murcia’, and ‘Cádiz’.

3.4. Determination of the optimal budget for the reduction of Spain’s dependence on fossil natural gas

The facility location problem is used to optimize the selection of the size, type, and location of the facilities for different available budgets. This allows drawing the Pareto curve (Fig. 6) between the self-sufficiency ratio and the selected waste treatment budget. The self-sufficiency ratio is defined as the ratio of biomethane produced to

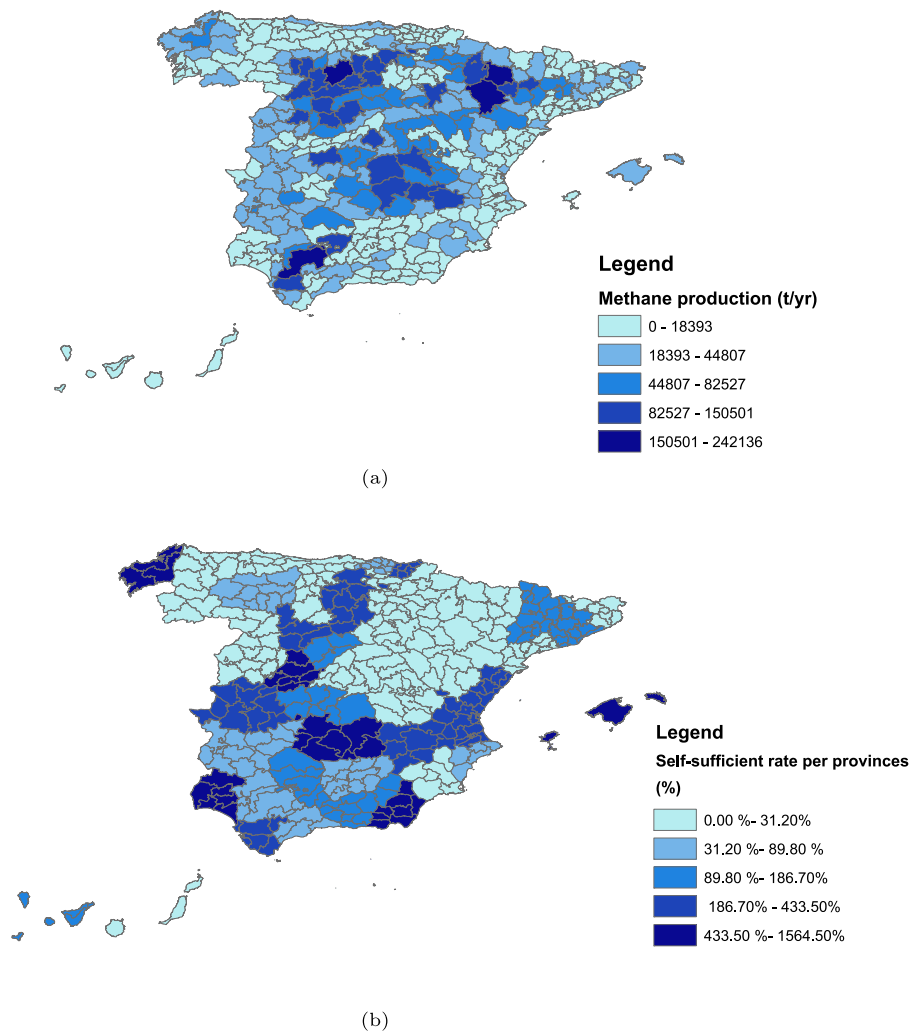


Fig. 5. Potential biomethane production (a) per agricultural district and demand for natural gas that it could satisfy per province (b).

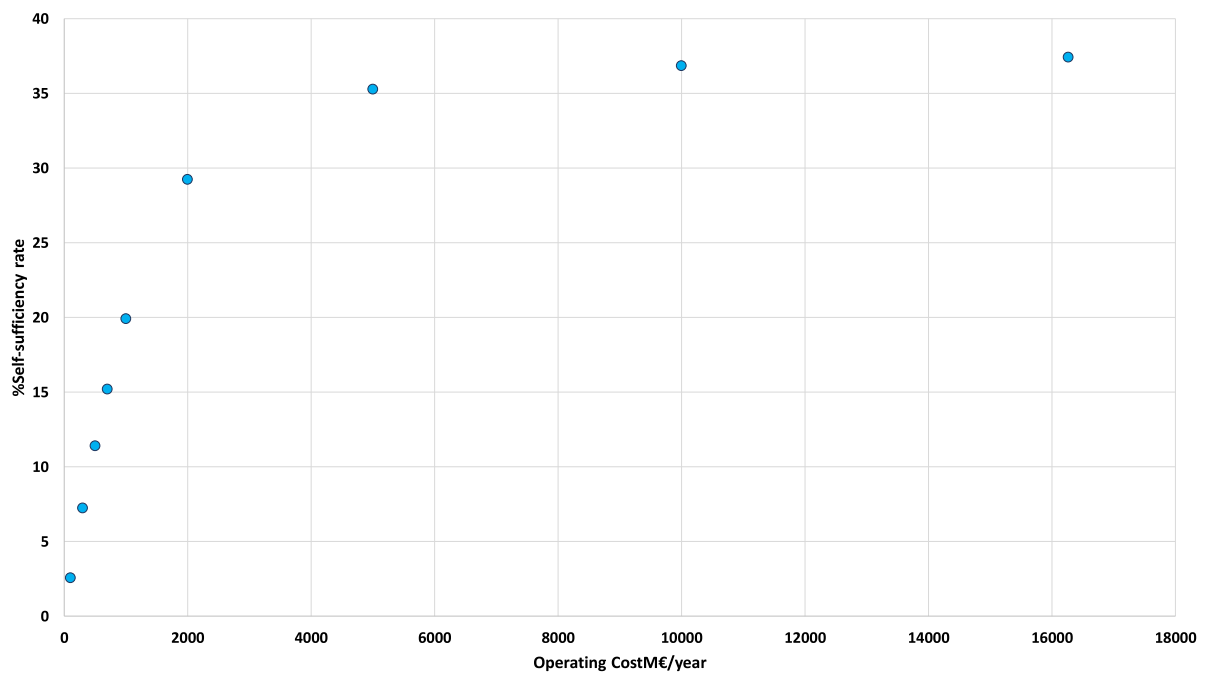


Fig. 6. Relation between the budget for operating cost and the self-sufficiency rate.

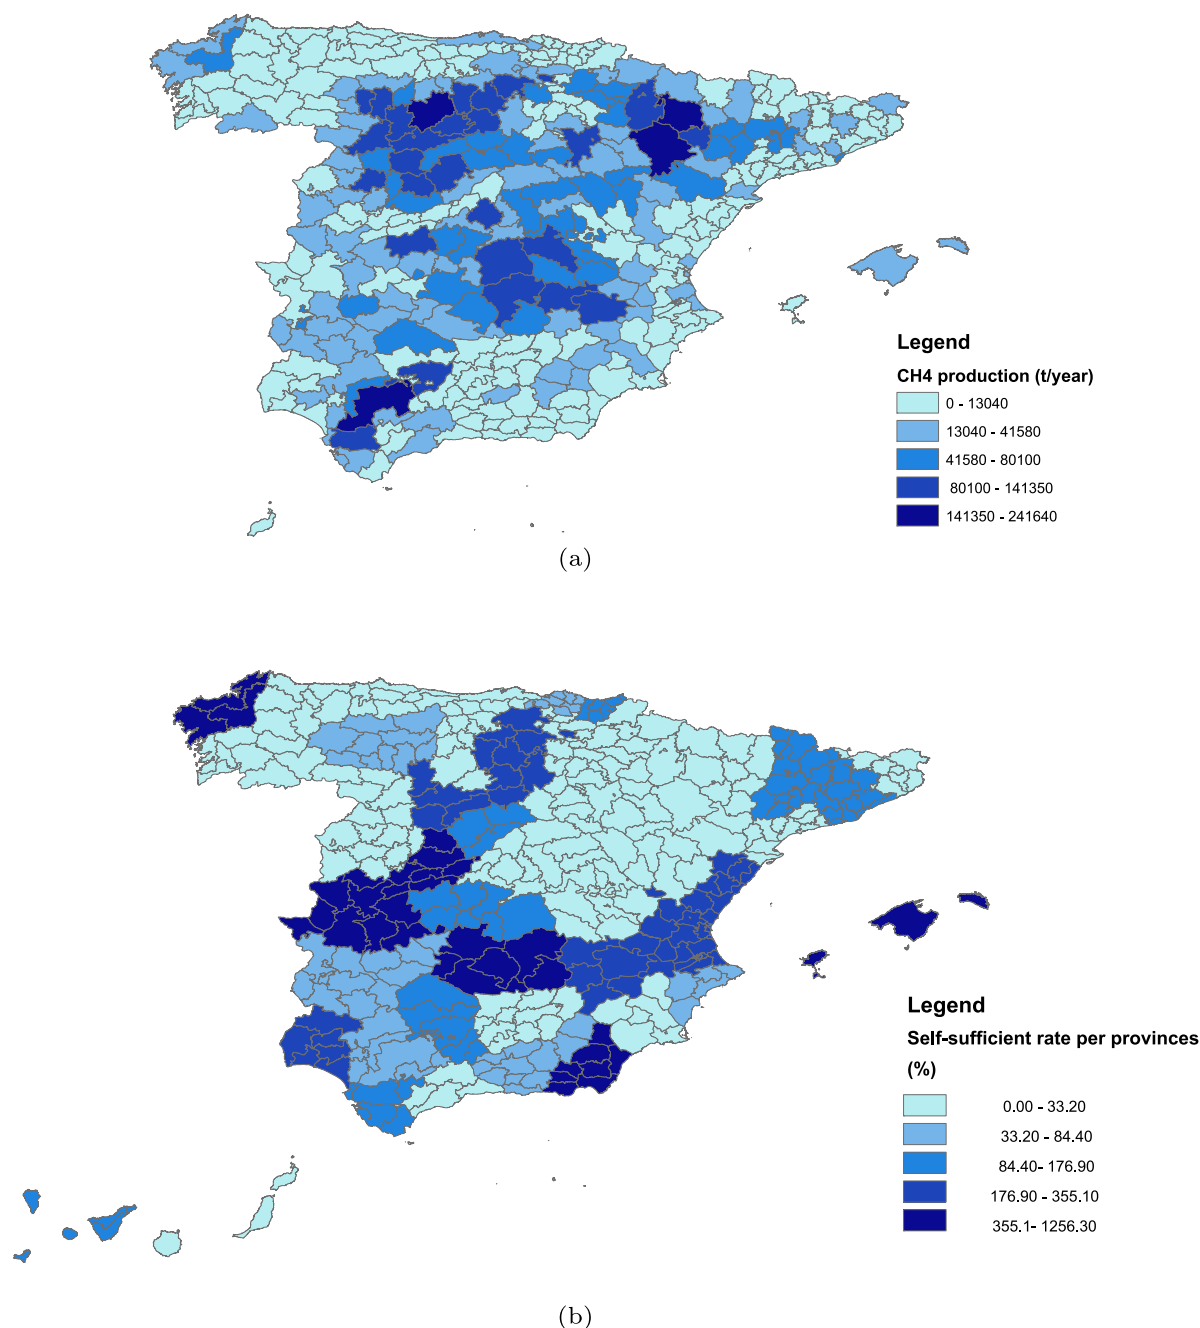


Fig. 7. Production of Biomethane (ton/year) with a budget of 5000 M€/year (a) and self-sufficient rate of each provinces (b)

methane consumed and is not linear. As can be seen in Fig. 6, there are two sections, divided by the point of 5000 M€ per year. In the first section, there is an increase of 2% in the self-sufficiency rate per 100 M€ spent, while in the second section, the self-sufficiency remains almost constant (0.02% per 100 M€ used). Therefore, the point of 5000 M€/year is selected as the best budget to spend on the construction of waste treatment plants in Spain. This OPEX corresponds to a CAPEX of 9505 M€.

For this budget, the amount of biomethane generated by the agricultural district can be seen in Fig. 7(a). This corresponds to 206 lignocellulosic waste, 141 manure, 148 MSW, and 0 sludge treatment plants, which can be seen in Figs. 8 and 9. With this distribution of treatment plants, it is possible to cover 35% of the country's total natural gas demand, and 19 provinces are totally independent of natural gas from foreign suppliers. These provinces correspond mostly to rural

areas, which have a higher concentration of lignocellulosic residues or manure, that is, greater potential for natural gas production and less access to the main gas pipelines.

From the techno-economy analysis of the plants, it is observed that 90% of the operating costs corresponds to fixed costs (labor, maintenance, capital charges, and insurance) while the remaining percentage correspond to variable costs (raw material, auxiliary services, and energy) in the case of gasification factories.

In anaerobic digestion processes, this distribution is even more uneven, with 99% versus 1%. Since plant size does not have a high effect on operational costs, the economy of scale is even more favored, pushing the selection of plant size to the maximum allowed in each of the selected agricultural districts. In the case of wet waste treatment (MSW and manure), larger designs are selected (above 35,000 tons per year for manure and 50,000 tons per year for MSW), representing

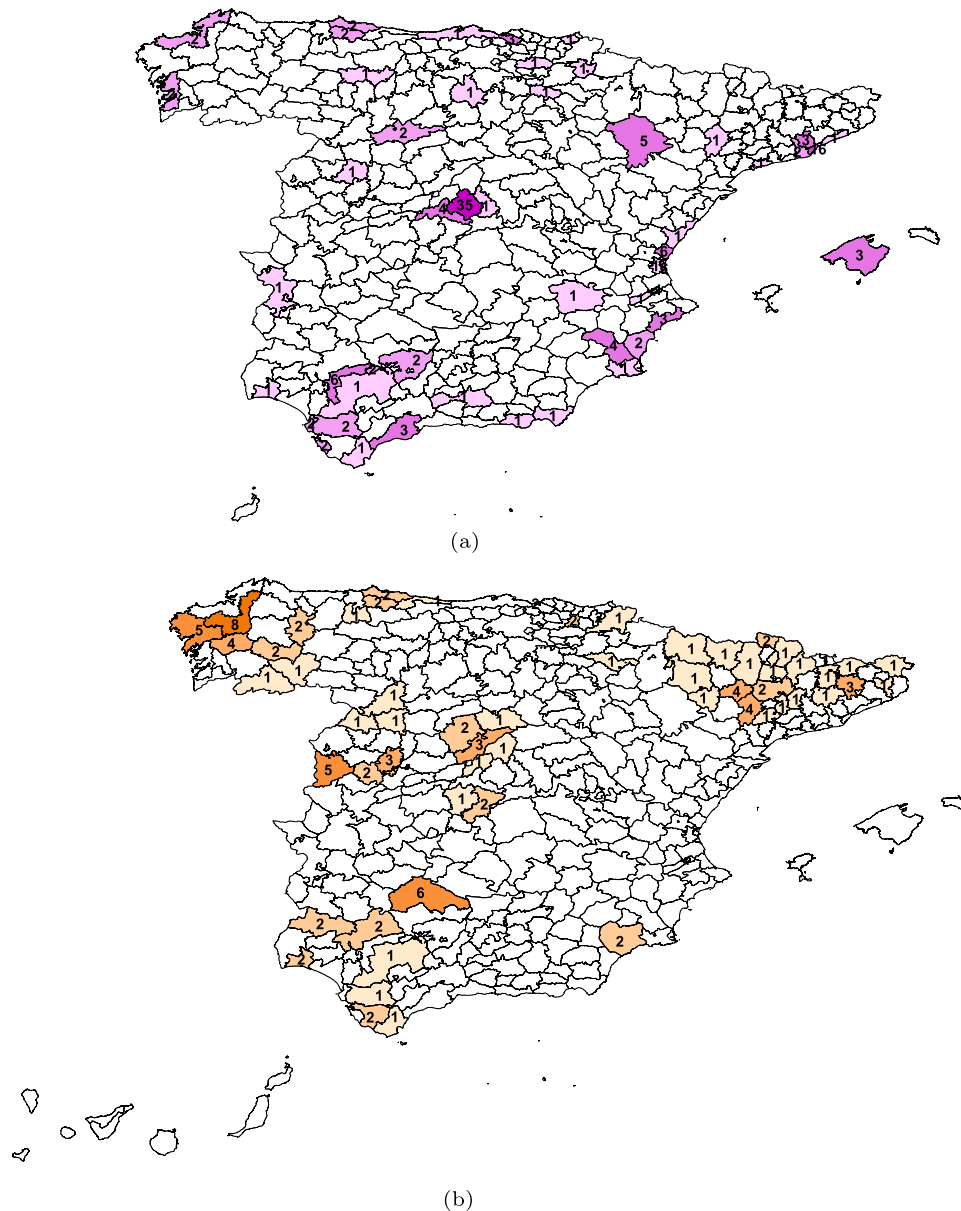


Fig. 8. Factories for the treatment of manure (a) and msw (b).

97% of the designed plants. In the case of dry waste, the plants are much larger and in most of the selected agricultural districts, there is not so much waste available for factories of those sizes. Therefore, the most selected plants are small (below 50,000 tons/year), representing 50% of the selected plants. 5000 M€ represents 40.6% of the budget of the Ministry for Ecological Transition and the Demographic Challenge (MITECO) in 2021 [50]. Considering the OPEX and the total amount of biomethane produced, the unit cost of biomethane is 34.8 €/MWh or 10.19 USD/MMBTU. Since this study is addressing a feasibility analysis, the margin of error of the biomethane cost estimate is 30% [40]. Therefore, this cost is between 7.13 and 13.25 USD/MMBTU and is below the current price of natural gas in Europe (39.02 USD/MMBTU) [51].

Finally, it is important to highlight that, as in the results shown in Section 3.3, there is a significant mismatch between the regions that demand natural gas and the districts that generate biomethane (see Fig. 7(b)).

4. Conclusions

Due to the energy dependence of European countries on foreign natural gas suppliers, any disruption in delivery could affect the energy security of a large number of countries. Because of this, together with the environmental problems associated with the generation of waste, it is essential to make the best use of the waste generated by both industry and the population. This work presents a multiscale and holistic analysis to assist in the decision-making process regarding waste treatment. It integrates a series of mathematical models that allow estimating the amount of biomethane that a country can produce, what is the best process and waste for it, the cost and location of the plants, taking into account the number of animals, the annual crop production, and the population of large cities, as well as the available budget.

As regards its application to the specific case of Spain, it was determined that almost half of the natural gas consumed could be produced by treating the total waste available.

By comparing the maximum biogas production potential with the optimal valorization of the available wastes, the results show that it is

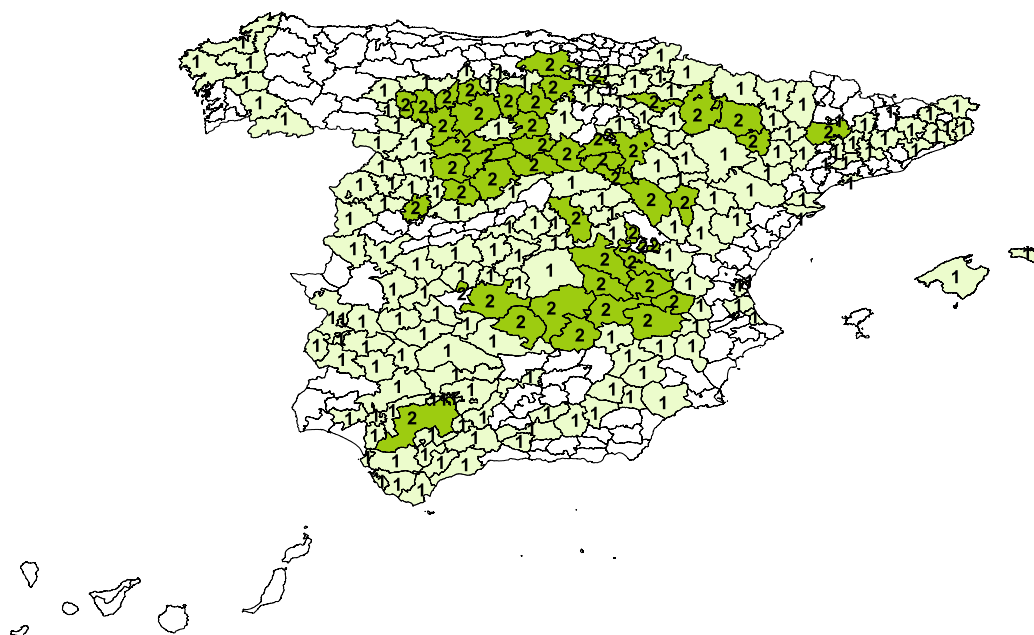


Fig. 9. Factories for the treatment of lignocellulosic wastes.

possible to reduce the total CAPEX and OPEX of the waste treatment plants down by 57.92% and 80.65% respectively, while the percentage of natural gas covered by biomethane was reduced by only 19% percent. Therefore, it is concluded that the point of greatest profitability is reached at 5000 M€ per year of operational costs.

This OPEX is of the order of the budget that is being allocated annually for MITECO. The government invests this budget in the elaboration of various plans for the improvement of water quality, waste treatment and sustainable energy production [52]. Among these plans, it has recently developed a specific plan to increase the country's energy security, for which this type of analysis is paramount [53]. With this OPEX, 19 provinces can be independent of natural gas from foreign suppliers. Since the gas supply is assured between these provinces, the development of decentralized structures can be taken into account, reducing the stress on the central pipelines. Moreover, by producing the natural gas at the site of consumption, the environmental and economic impacts are reduced by avoiding the necessary transportation between the points of consumption and the nearest pipeline. Therefore, this can be a strong incentive to create energy policies focused on prioritizing the construction of waste treatment plants oriented to biomethane production in these specific areas. From the results of the analysis, it is also concluded that the most cost-effective process is gasification, so the treatment of lignocellulosic waste is prioritized over other wet wastes. This means that most of the plants are located close to the large cultivation areas, that is, around the center of the country.

This analysis is easily applicable to other countries, simply by changing the databases. In addition, certain physicochemical parameters, such as waste composition, can be adjusted for particular cases, in order to improve the estimates, without affecting the procedure described in this work.

Finally, as society moves towards a zero-carbon energy production system, these plants can be easily adapted to produce green hydrogen [54], which can be used either as a fuel or raw material to produce other chemical products.

CRediT authorship contribution statement

Manuel Taifouris: Writing – original draft, Software, Methodology, Formal analysis. **Mariano Martín:** Conceptualization, Writing – review & editing, Supervision, Funding acquisition.

Declaration of competing interest

The authors declare the following financial interests/personal relationships which may be considered as potential competing interests: Guillermo Galan reports financial support was provided by Ministry of Education Council of Universities.

Data availability

Data will be made available on request.

Acknowledgments

The authors would like to acknowledge Salamanca Research for the optimization licenses, the funding received from the European Union's Horizon 2020 research, innovation program under the Marie Skłodowska-Curie grant agreement no 778168. M.T. appreciates the FPI Ph.D. fellowship from the Junta de Castilla y León.

Appendix A. Supplementary data

Supplementary material related to this article can be found online at <https://doi.org/10.1016/j.apenergy.2022.120544>.

References

- [1] European Comision. FINAL REPORT of the high-level panel of the European decarbonisation pathways initiative. 2018, <http://dx.doi.org/10.2777/476014>, URL: https://ec.europa.eu/info/sites/default/files/research_and_innovation_research_by_area/documents/ec_rtd_decarbonisation-report_112018.pdf.
- [2] Martins F, Felgueiras C, Smitková M. Fossil fuel energy consumption in European countries. Energy Procedia 2018;153:107–11. <http://dx.doi.org/10.1016/J.EGYPRO.2018.10.050>.
- [3] Economides MJ, Wood DA. The state of natural gas. J Nat Gas Sci Eng 2009;1:1–13. <http://dx.doi.org/10.1016/j.jngse.2009.03.005>.
- [4] Mišík M. The EU needs to improve its external energy security. Energy Policy 2022;165:112930. <http://dx.doi.org/10.1016/J.ENPOL.2022.112930>.
- [5] Urciuoli L, Hints J, Boekesteijn EG. The resilience of energy supply chains: A multiple case study approach on oil and gas supply chains to Europe. Supply Chain Manag: Int J 2014;19:46–63. <http://dx.doi.org/10.1108/SCM-09-2012-0307>, URL: <https://www.emeraldinsight.com/1359-8546.htm>.

- [6] Cordeiro MR, Mengistu GF, Pogue SJ, Legesse G, Gunte KE, Taylor AM, et al. Assessing feed security for beef production within livestock-intensive regions. *Agric Syst* 2022;196:103348. <http://dx.doi.org/10.1016/J.AGSY.2021.103348>.
- [7] Menzi H, Oenema O, Burton C, Shipin O, Gerber P, Robins T, et al. 9 impacts of intensive livestock production and manure management on the environment. In: Steinfeld H, Mooney HA, Schneider F, Neville LE, editors. *Livestock changing landscape*, Vol. 1. Washington, DC: Island Press; 2009, p. 139–58, URL: https://books.google.es/books?hl=es&lr=&id=lug9AF-wVR8C&oi=fnd&pg=PA139&dq=issue+manure+management+intensive&ots=hDRo_1PVAf&sig=_8MfpVld_9jK2UneYxfm_hQ2Q8M#v=onepage&q=issue%20manure%20management%20intensive&f=false.
- [8] European Comision. Municipal waste statistics - statistics explained. 2021, URL: https://ec.europa.eu/eurostat/statistics-explained/index.php?title=Municipal_waste_statistics.
- [9] León E, Martín M. Optimal production of power in a combined cycle from manure based biogas. *Energy Convers Manage* 2016;114:89–99. <http://dx.doi.org/10.1016/j.enconman.2016.02.002>.
- [10] Sánchez A, Martín M, Vega P. Biomass based sustainable ammonia production: Digestion vs gasification. *ACS Sustain Chem Eng* 2019;7:9995–10007. <http://dx.doi.org/10.1021/acssuschemeng.9b01158>, URL: <https://pubs.acs.org/doi/full/10.1021/acssuschemeng.9b01158>.
- [11] Wang S, Jena U, Das KC. Biomethane production potential of slaughterhouse waste in the United States. *Energy Convers Manage* 2018;173:143–57. <http://dx.doi.org/10.1016/J.ENCONMAN.2018.07.059>.
- [12] Bidart C, Fröhling M, Schultmann F. Municipal solid waste and production of substitute natural gas and electricity as energy alternatives. *Appl Therm Eng* 2013;51:1107–15. <http://dx.doi.org/10.1016/J.APPLTHERMALENG.2012.10.021>.
- [13] Smyth BM, Smyth H, Murphy JD. Determining the regional potential for a grass biomethane industry. *Appl Energy* 2011;88:2037–49. <http://dx.doi.org/10.1016/J.APENERGY.2010.12.069>.
- [14] National Research Council. Nutrient requirements of beef cattle. National Academies Press; 2000. <http://dx.doi.org/10.17226/9791>.
- [15] Angelidaki I, Ellegaard L, Ahring BK. A comprehensive model of anaerobic bioconversion of complex substrates to biogas. *Biotechnol Bioeng* 1999;63:363–72. [http://dx.doi.org/10.1002/\(SICI\)1097-0290\(19990505\)63:3](http://dx.doi.org/10.1002/(SICI)1097-0290(19990505)63:3), URL: <https://onlinelibrary.wiley.com/doi/10.1002/>.
- [16] Taifouris MR, Martín M. Multiscale scheme for the optimal use of residues for the production of biogas across Castile and Leon. *J Clean Prod* 2018;185:239–51. <http://dx.doi.org/10.1016/j.jclepro.2018.03.018>.
- [17] Makara A, Kowalski Z. Selection of pig manure management strategies: Case study of Polish farms. *J Clean Prod* 2018;172:187–95. <http://dx.doi.org/10.1016/J.JCLEPRO.2017.10.095>.
- [18] Floudas CA, Niziolek AM, Onel O, Matthews LR. Multi-scale systems engineering for energy and the environment: Challenges and opportunities. *AIChE J* 2016;62:602–23. <http://dx.doi.org/10.1002/AIC.15151>.
- [19] Heras J, Martín M. Multiscale analysis for power-to-gas-to-power facilities based on energy storage. *Comput Chem Eng* 2021;144:107147. <http://dx.doi.org/10.1016/J.COMPCHEMENG.2020.107147>.
- [20] Taifouris M, Martín M. Integrating intensive livestock and cropping systems: Sustainable design and location. *Agric Syst* 2022;203:103517. <http://dx.doi.org/10.1016/J.AGSY.2022.103517>, URL: <https://linkinghub.elsevier.com/retrieve/pii/S0308521X22001536>.
- [21] Weiland P. Biogas production: Current state and perspectives. *Appl Microbiol Biotechnol* 2009 85:4 2009;85:849–60. <http://dx.doi.org/10.1007/S00253-009-2246-7>, URL: <https://link.springer.com/article/10.1007/s00253-009-2246-7>.
- [22] Merino D. Cuantificación Y Caracterización De Los Residuos Ganaderos De Gipuzkoa. 2006, URL: <https://www.gipuzkoa.eus/documents/2227195/2229002/ProyectoAnexo1.pdf/cb1e9e26-1d42-6af4-a694-2d765b627827>.
- [23] INE. España en cifras 2019. 2019, URL: https://www.ine.es/prodys/espa_cifras/2019/.
- [24] Bianchini A, Pellegrini M, Sacconi C, Bonfiglioli L. Sewage sludge management in Europe: A critical analysis of data quality. *Int J Environ Waste Manag* 2016;18:226–38. <http://dx.doi.org/10.1504/IJEW.2016.10001645>, URL: <https://www.researchgate.net/publication/311273547>.
- [25] García-Condado S, López-Lozano R, Panarello L, Cerrani I, Nisini L, Zucchini A, et al. Assessing lignocellulosic biomass production from crop residues in the European union: Modelling, analysis of the current scenario and drivers of interannual variability. *GCB Bioenergy* 2019;11:809–31. <http://dx.doi.org/10.1111/gcbb.12604>, URL: <https://onlinelibrary.wiley.com/doi/abs/10.1111/gcbb.12604>, <https://onlinelibrary.wiley.com/doi/10.1111/gcbb.12604>.
- [26] Kafle GK, Chen L. Comparison on batch anaerobic digestion of five different livestock manures and prediction of biochemical methane potential (BMP) using different statistical models. *Waste Manag* 2016;48:492–502. <http://dx.doi.org/10.1016/J.WASMAN.2015.10.021>.
- [27] Park KY, Jang HM, Park MR, Lee K, Kim D, Kim YM. Combination of different substrates to improve anaerobic digestion of sewage sludge in a wastewater treatment plant. *Int Biodegradation Biodegrad* 2016;109:73–7. <http://dx.doi.org/10.1016/J.IBIOD.2016.01.006>.
- [28] Liew CS, Yunus NM, Chidi BS, Lam MK, Goh PS, Mohamad M, et al. A review on recent disposal of hazardous sewage sludge via anaerobic digestion and novel composting. *J Hard Mater* 2022;423:126995. <http://dx.doi.org/10.1016/J.JHAZMAT.2021.126995>.
- [29] Li Y, Ni J, Cheng H, Zhu A, Guo G, Qin Y, et al. Methanogenic performance and microbial community during thermophilic digestion of food waste and sewage sludge in a high-solid anaerobic membrane bioreactor. *Bioresour Technol* 2021;342:125938. <http://dx.doi.org/10.1016/J.BIORTECH.2021.125938>.
- [30] Alibardi L, Cossu R. Composition variability of the organic fraction of municipal solid waste and effects on hydrogen and methane production potentials. *Waste Manag* 2015;36:147–55. <http://dx.doi.org/10.1016/J.WASMAN.2014.11.019>.
- [31] Nielfa A, Cano R, Vinot M, Fernández E, Fdz-Polanco M. Anaerobic digestion modeling of the main components of organic fraction of municipal solid waste. *Process Saf Environ Prot* 2015;94:180–7. <http://dx.doi.org/10.1016/J.PSEP.2015.02.002>.
- [32] Wilen C, Moilanen A, Kurkela E. Biomass feedstock analyses. *Uniuersytet Ślaski* 1996;343–54, doi: 10.2/JQUERY.MIN.JS, URL: <https://cris.vtt.fi/en/publications/biomass-feedstock-analyses>.
- [33] Blasi CD. Modeling wood gasification in a countercurrent fixed-bed reactor. *AIChE J* 2004;50:2306–19. <http://dx.doi.org/10.1002/aic.10189>, URL: <https://onlinelibrary.wiley.com/doi/10.1002/aic.10189>.
- [34] Phillips S, Aden A, Jechura J, Dayton D, Eggeman T. Thermochemical ethanol via indirect gasification and mixed alcohol synthesis of lignocellulosic biomass. 2007, <http://dx.doi.org/10.2172/1216397>, URL: <https://www.osti.gov/servlets/purl/1216397/>.
- [35] Roh HS, Lee DK, Koo KY, Jung UH, Yoon WL. Natural gas steam reforming for hydrogen production over metal monolith catalyst with efficient heat-transfer. *Int J Hydrogen Energy* 2010;35:1613–9. <http://dx.doi.org/10.1016/j.ijhydene.2009.12.051>.
- [36] Aasberg-Petersen K, Christensen TS, Nielsen CS, Dybkjær I. Recent developments in autothermal reforming and pre-reforming for synthesis gas production in GTL applications. *Fuel Process Technol* 2003;83:253–61. [http://dx.doi.org/10.1016/S0378-3820\(03\)00073-0](http://dx.doi.org/10.1016/S0378-3820(03)00073-0).
- [37] Duret A, Friedli C, Maréchal F. Process design of synthetic natural gas (SNG) production using wood gasification. *J Clean Prod* 2005;13:1434–46. <http://dx.doi.org/10.1016/j.jclepro.2005.04.009>.
- [38] Appl M. Ammonia: Principles and industrial practice. Wiley; 1999, <http://dx.doi.org/10.1002/9783527613885>, URL: <https://onlinelibrary.wiley.com/doi/book/10.1002/9783527613885>.
- [39] Rico J. El sector calcula que se deben construir 10.000 plantas de biogás más en Europa para cumplir con su potencial - Energías Renovables, el periodismo de las energías limpias. *Energí Renovables* 2020. URL: <https://www.energias-renovables.com/bioenergia/el-sector-calcula-que-se-deben-construir-20200915>.
- [40] Sinnott RK. *Chemical engineering design*, Vol. 6. 6th Edition. Amsterdam; Heidelberg u.a.: Elsevier; 2005, p. 339–59.
- [41] Couper JR, Penney WR, Fair JR, Walas SM. *Chemical process equipment*, Vol. 1. 2nd ed.. Burlington: Elsevier Inc.; 2005, p. 719–28. <http://dx.doi.org/10.1016/B978-0-7506-7510-9.X5000-1>.
- [42] Almena A, Martín M. Technoeconomic analysis of the production of epichlorohydrin from glycerol. *Ind Eng Chem Res* 2016;55:3226–38. <http://dx.doi.org/10.1021/acs.iecr.5b02555>, URL: <https://pubs.acs.org/doi/abs/10.1021/acs.iecr.5b02555>.
- [43] Gobierno de España. PERTE agroalimentario. 2022, URL: <https://www.lamoncloa.gob.es/consejodeministros/resumenes/Documents/2022/080222-ResumenEjecutivoPERTEAgro.pdf>.
- [44] Enagas. Boletín Estadístico. 2022, URL: <https://www.enagas.es/content/dam/enagas/es/ficheros/gestion-tecnica-sistema/energy-data/publicaciones/boletin-estadistico-del-gas/Boletin-Estadistico-Gas-agosto-2022.pdf>.
- [45] European Biogas Association. Biomethane map 2021. 2021, URL: <https://www.europeanbiogas.eu/biomethane-map-2021/>.
- [46] Escudero AP, Mancheño SL, López JJP. Anuario de estadística 2020. 2021, URL: <https://www.mapa.gob.es/estadistica/pags/anuario/2020/ANUARIO/AE20.pdf>.
- [47] Instituto nacional de estadística. Explotaciones ganaderas por tipo de ganado. 2021, URL: <https://www.ine.es/jaxi/Tabla.htm?tpx=52076>.
- [48] Comisión Nacional de los Mercados y la Competencia. Comisión Nacional de los Mercados y la Competencia. 2021, URL: <https://www.cnmc.es/expedientes/isde01620>.
- [49] Ministerio para la Transición Ecológica. BOE.es - BOE-A-2018-14557 Resolución de 8 de octubre de 2018, de la Dirección General de Política Energética y Minas, por la que se modifican las normas de gestión técnica del sistema NGTS-06, NGTS-07 y los protocolos de detalle PD-01 y PD-02. 2018, p. 102917–50, URL: https://www.boe.es/diario_boe/txt.php?id=BOE-A-2018-14557.
- [50] Ministerio para la transición ecológica y el reto demográfico. El MITECO incrementa su presupuesto un 132% para impulsar la transición ecológica, avanzar hacia la neutralidad climática en 2050 y abordar el reto demográfico. 2020, URL: <https://www.miteco.gob.es/es/prensa/ultimas-noticias/el-miteco-incrementa-su-presupuesto-un-132-para-impulsar-la-transici%C3%B3n-ecol%C3%B3gica-avanzar-hacia-la-neutralidad-clim%C3%A1tica-en-2050-y-abordar-el-ret/tcm:30-516034>.

- [51] World Bank. European union natural gas import price. 2022, URL: https://ycharts.com/indicators/europe_natural_gas_price.
- [52] Ministerio para la transición ecológica y reto demográfico. Planes y estrategias por áreas de actividad. 2022, URL: <https://www.miteco.gob.es/es/ministerio/planes-estrategias/planes-y-estrategias-por-area-de-actividad/>.
- [53] Ministerio para la transición ecológica y reto demográfico. Plan + seguridad energética. 2022, URL: <https://www.miteco.gob.es/es/ministerio/planes-estrategias/seguridad-energetica/>.
- [54] Antonini C, Treyer K, Streb A, van der Spek M, Bauer C, Mazzotti M. Hydrogen production from natural gas and biomethane with carbon capture and storage - A techno-environmental analysis. *Sustain Energy Fuels* 2020;4:2967–86. <http://dx.doi.org/10.1039/d0se00222d>, URL: <https://pubs.rsc.org/en/content/articlelanding/2020/se/d0se00222d>.